

Product Specifications

Part Numbers Information

Electrical Specifications

Voltage Rating:

250VAC (100mA-10A)

32VDC (12A-30A)

Operating Temperature:-55°C ~ 125°C

Standards

100mA-10A

12A-30A

Tested to UL 248-14 Standard. File E197390

Tested to CSA C22.2 No.248.14 Standard. File E197390



Interrupting Rating

10kA @125VAC (32mA-10A)

35A @250VAC (32mA-1A)

100A @250VAC (1.2A-3.5A)

200A @ 250VAC(4A-10A)

100A @125VAC (1A-15A) (PSE) (Cartridge Style)

500A @125VAC (1A-15A) (PSE) (Pigtail Style)

100A @ 125VAC (16A-30A) (PSE) (Pigtail Style)

100A @250VAC (1A-30A) (PSE)


100A @ 250VAC (100mA-10A) KC

300A @ 32VAC/DC (12A-30A)

Material Specifications


Body Material: Glass

Mechanical Dimensions: Inches [mm]

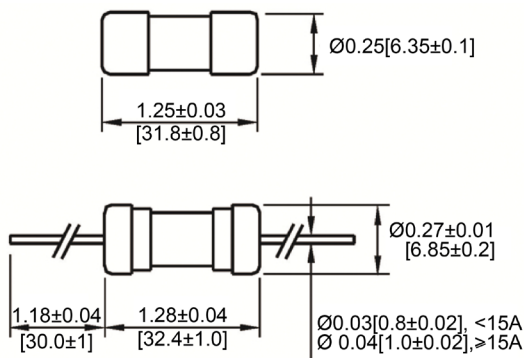


Cartridge P/N	Axial Lead P/N	Ampere Rating	I ² T Reference (A ² Sec)
FSA-100mA	FSA-100mA-P	100mA	0.00194
FSA-125mA	FSA-125mA-P	125mA	0.00373
FSA-150mA	FSA-150mA-P	150mA	0.00685
FSA-160mA	FSA-160mA-P	160mA	0.00782
FSA-200mA	FSA-200mA-P	200mA	0.00655
FSA-250mA	FSA-250mA-P	250mA	0.0123
FSA-300mA	FSA-300mA-P	300mA	0.0215
FSA-315mA	FSA-315mA-P	315mA	0.0239
FSA-350mA	FSA-350mA-P	350mA	0.0384
FSA-400mA	FSA-400mA-P	400mA	0.0515
FSA-500mA	FSA-500mA-P	500mA	0.112
FSA-600mA	FSA-600mA-P	600mA	0.213
FSA-630mA	FSA-630mA-P	630mA	0.239
FSA-750mA	FSA-750mA-P	750mA	0.399
FSA-800mA	FSA-800mA-P	800mA	0.504
FSA-1A	FSA-1A-P	1A	0.968
FSA-1.2A	FSA-1.2A-P	1.2A	1.751
FSA-1.25A	FSA-1.25A-P	1.25A	1.788
FSA-1.5A	FSA-1.5A-P	1.5A	3.565
FSA-1.6A	FSA-1.6A-P	1.6A	4.026
FSA-2A	FSA-2A-P	2A	8.57
FSA-2.5A	FSA-2.5A-P	2.5A	14.21
FSA-3A	FSA-3A-P	3A	23.12
FSA-3.15A	FSA-3.15A-P	3.15A	25.7
FSA-3.5A	FSA-3.5A-P	3.5A	32.15
FSA-4A	FSA-4A-P	4A	43.65
FSA-5A	FSA-5A-P	5A	72.54
FSA-6A	FSA-6A-P	6A	120.2
FSA-6.3A	FSA-6.3A-P	6.3A	168.7
FSA-7A	FSA-7A-P	7A	195.3
FSA-8A	FSA-8A-P	8A	393
FSA-9A	FSA-9A-P	9A	476.5
FSA-10A	FSA-10A-P	10A	556.9
FSA-12A	FSA-12A-P	12A	805.9
FSA-15A	FSA-15A-P	15A	1868
FSA-16A	FSA-16A-P	16A	2196
FSA-20A	FSA-20A-P	20A	3212
FSA-25A	FSA-25A-P	25A	5902
FSA-30A	FSA-30A-P	30A	8494


Time vs Percent of Rated Current

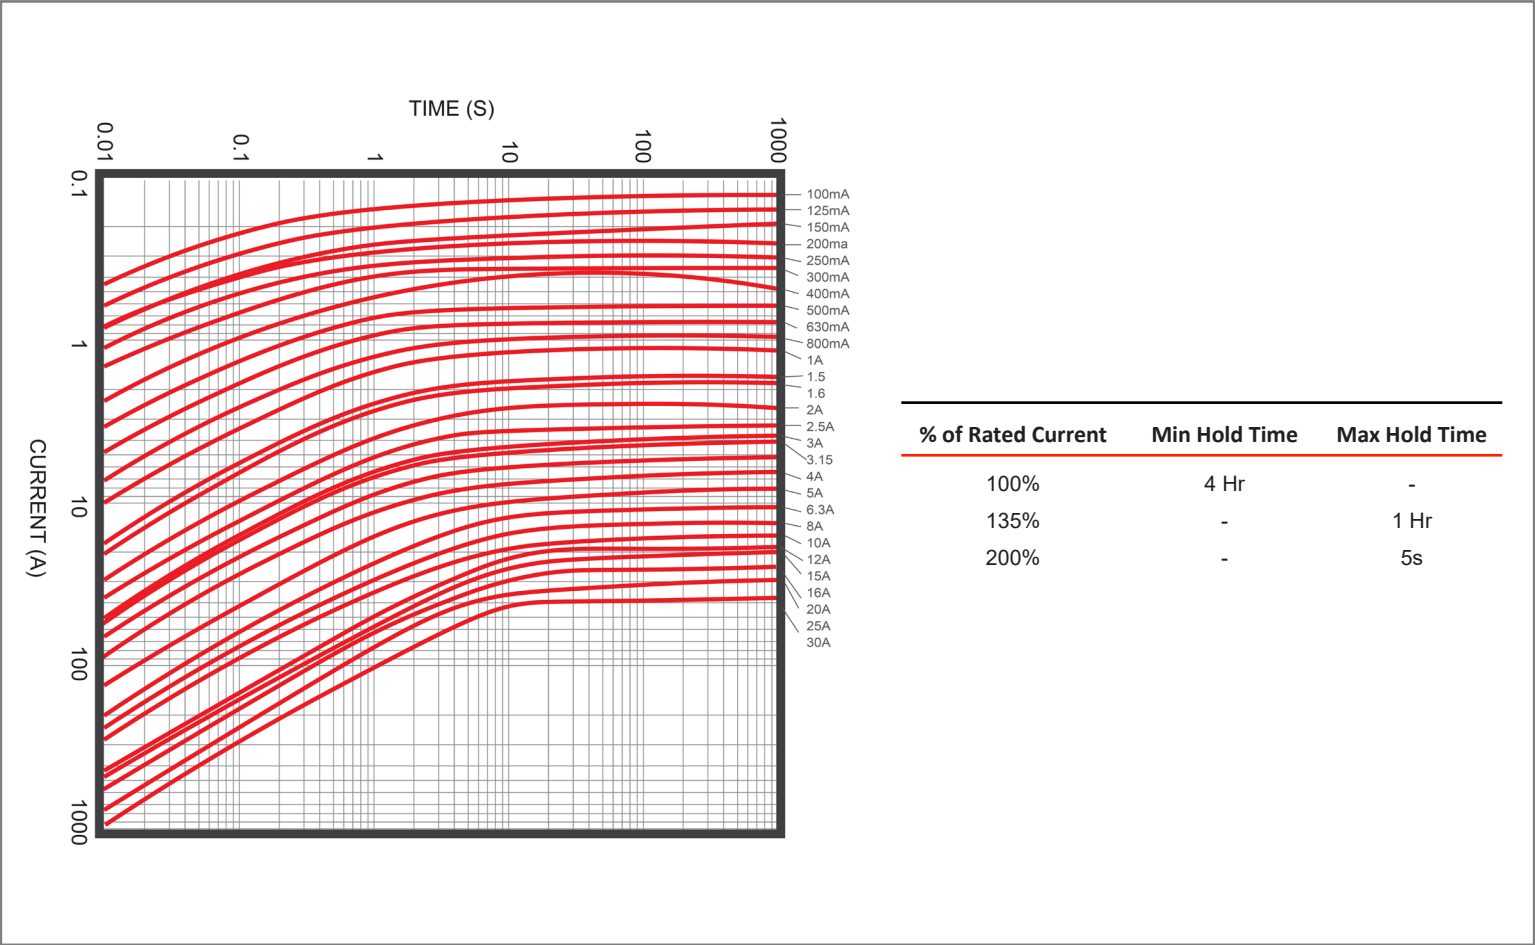

Blister Pack: Inches [mm]

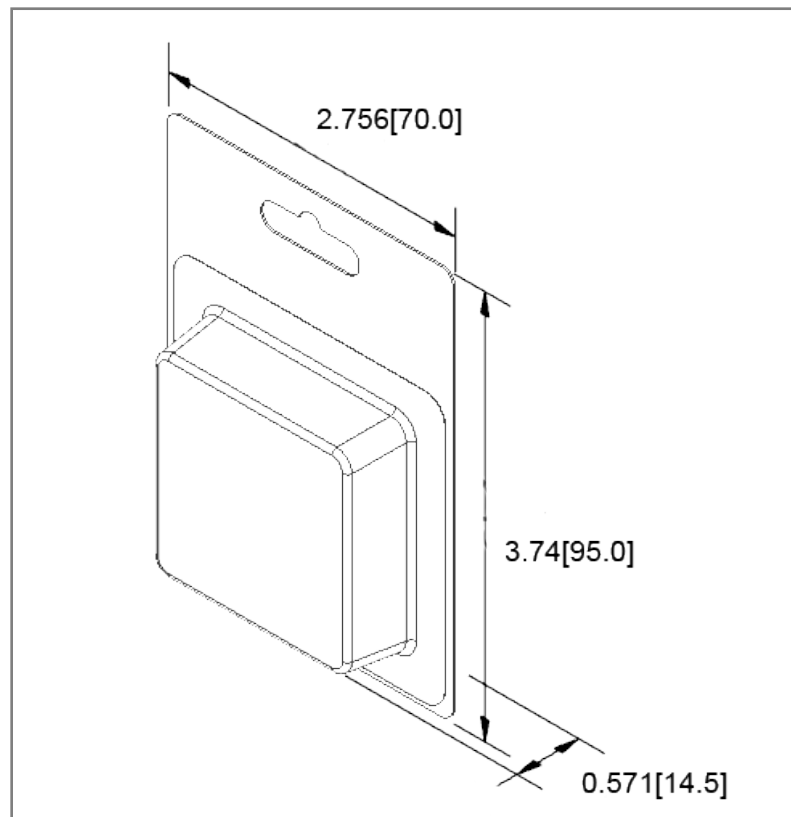

Pill Box: Inches [mm]

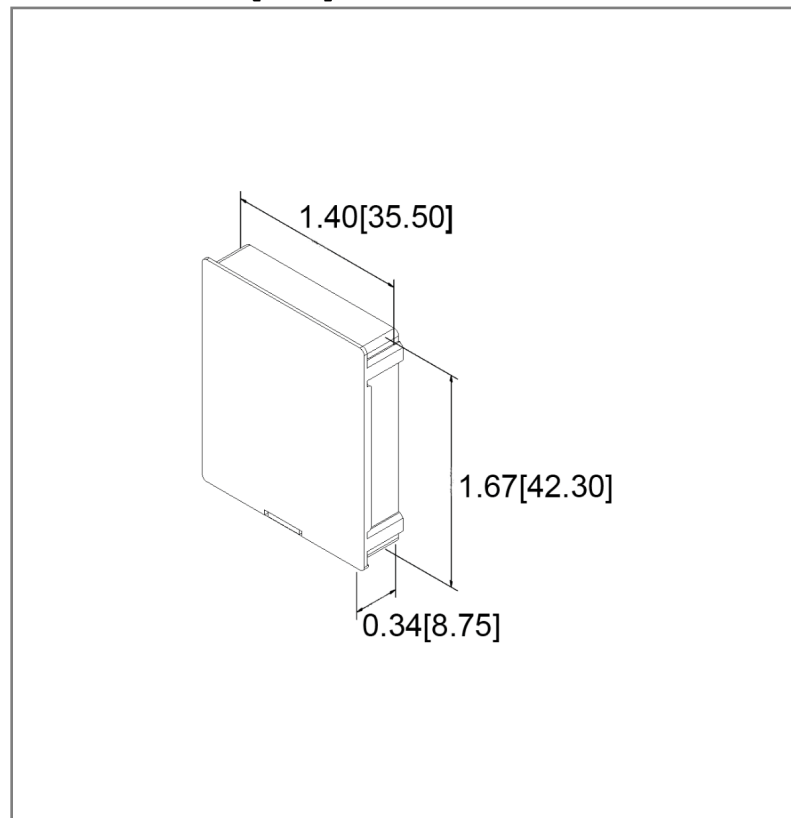

Retail Pack Part Number Information

Ampere Rating	Retail Pack # Blister Card (5PCS)	Retail Pack # Pill Box (5PCS)
100mA	FSA-100mA-BP	FSA-100mA-BX
125mA	FSA-125mA-BP	FSA-125mA-BX
150mA	FSA-150mA-BP	FSA-150mA-BX
200mA	FSA-200mA-BP	FSA-200mA-BX
250mA	FSA-250mA-BP	FSA-250mA-BX
300mA	FSA-300mA-BP	FSA-300mA-BX
315mA	FSA-315mA-BP	FSA-315mA-BX
400mA	FSA-400mA-BP	FSA-400mA-BX
500mA	FSA-500mA-BP	FSA-500mA-BX
600mA	FSA-600mA-BP	FSA-600mA-BX
750mA	FSA-750mA-BP	FSA-750mA-BX
800mA	FSA-800mA-BP	FSA-800mA-BX
1A	FSA-1A-BP	FSA-1A-BX
1.5A	FSA-1.5A-BP	FSA-1.5A-BX
1.6A	FSA-1.6A-BP	FSA-1.6A-BX
2A	FSA-2A-BP	FSA-2A-BX
2.5A	FSA-2.5A-BP	FSA-2.5A-BX
3A	FSA-3A-BP	FSA-3A-BX
3.15A	FSA-3.15A-BP	FSA-3.15A-BX
3.5A	FSA-3.5A-BP	FSA-3.5A-BX
4A	FSA-4A-BP	FSA-4A-BX
5A	FSA-5A-BP	FSA-5A-BX
6A	FSA-6A-BP	FSA-6A-BX
6.3A	FSA-6.3A-BP	FSA-6.3A-BX
7A	FSA-7A-BP	FSA-7A-BX
7.5A	FSA-7.5A-BP	FSA-7.5A-BX
8A	FSA-8A-BP	FSA-8A-BX
9A	FSA-9A-BP	FSA-9A-BX
10A	FSA-10A-BP	FSA-10A-BX
12A	FSA-12A-BP	FSA-12A-BX
15A	FSA-15A-BP	FSA-15A-BX
20A	FSA-20A-BP	FSA-20A-BX
25A	FSA-25A-BP	FSA-25A-BX
30A	FSA-30A-BP	FSA-30A-BX

* Retail packs are for cartridge style fuses only

Rev Date of issue Revision Notes

Designed Approved

B	05-02-2024	Initial Drawing	RC	OF
---	------------	-----------------	----	----